# AQA®

REF. 88G

Shower laminated glass and stainless steel AISI 316L
(Marine quality). Satin finish.

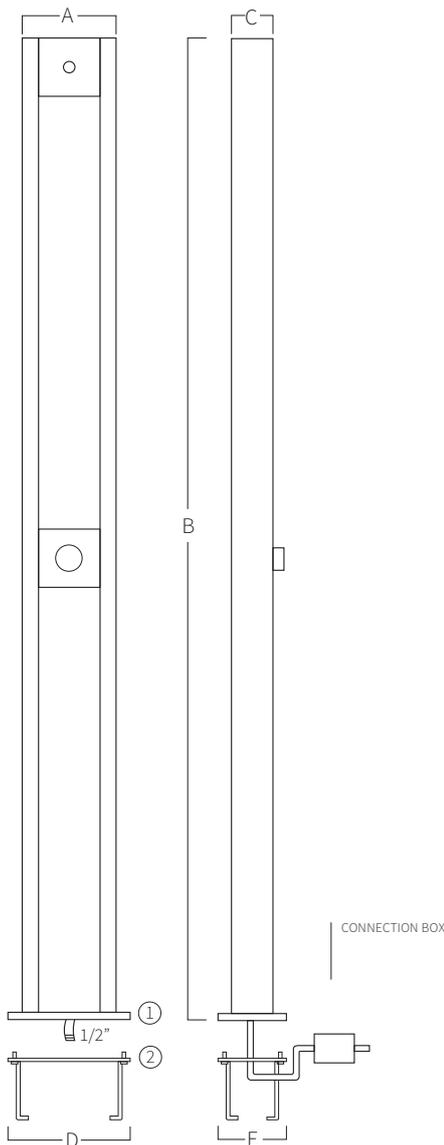| Support Included	Nuts Included (4 units)	**12** l/min / **3bar**	Tap (A-C)	Tap (B)	Earth Connection

Remote control	RGB

RGB CONTROLLER
- Connect the black and red cables to RGB controller.
- It is inside the shower.

WATERPROOF BOX FOR CONNECTION (CONTAINS TRANSFORMER AND RGB CONTROLLER)

LENGHT/WIDTH/HIGH: 12x16x8cm

- Put the transformer inside the connection box and install a 1/2 meter to two of the shower.

- The connection from the box to the electrical outlet has a length according to the needs of the project. (Cable not included).

A	B	C	D	E
215	2200	95	275	155
08,46	*86,61*	*03,74*	*10,83*	*06,10*

Measure in mm
Measure in inch

① *Trim.*

② *Support to embed at ground level.*

MOUNTING SYSTEM

1) The platen has to be at the ground level.

2) Fix the earth connection to the support.

3) The central opening is to pass the water intake with 1/2" female fitting.

4) Fix the shower with nuts (4 units).

   a) 1 connection 1/2" female fitting for pusher A and faucet C.

   b) 2 connections 1/2" female fitting for shower mixer B.

* Includes remote control for LEDS and 12V-240VAC transformer.

CONNECTION BOX

1/2"