


REF. 85S

Shower with proximity sensor in stainless steel AISI 316L (Marine quality). Satin finished.



Support
Included



Nuts
Included




Earth
Connection



12 L/m
3bar

A	B	C	D	E
130	2200	95	175	150
05,12	86,61	03,74	06,89	05,91


Measure in mm
Measure in inch

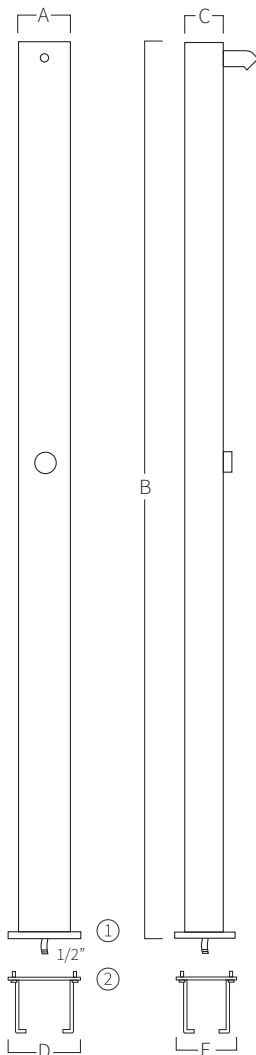

MOUNTING SYSTEM

- 1) The platen has to be at the ground level.
- 2) Fix the earth connection to the support.
- 3) The central opening is to pass the water connection with 1/2" female fitting and power cable for 24VDC.
- 4) Connect the water intake to 1/2" female fitting.
- 5) Connect the power cable from the power source to the shower connection box.
- 6) Connect the power source cable to the electrical network.
- 7) Fix the shower with the nuts.

WATERPROOF BOX FOR CONNECTION



LENGTH/WIDTH/HIGH: 12x16x8cm

- Put the power source inside the connection box and install at least 2,5 meters away from the shower.
- The connection from the box to the electrical outlet has a length according to the needs of the project (Cable not included).