



REF. 105CR


Waterfall with chromotherapy in stainless steel AISI 316L (Marine quality).





RGB



Remote Control




Earth Connection

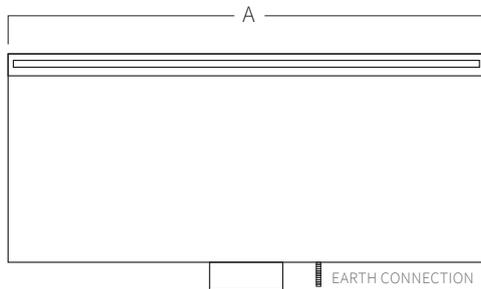

A	B	C	D	E
500	140	170	120	50
19,69	05,51	06,69	04,72	01,97
1000	140	170	120	50
39,37	05,51	06,69	04,72	01,97

Mesures en mm
Measure in inch



RGB CONTROLLER

Connect the black and red cables to RGB controller.

WATERPROOF BOX FOR CONNECTION (CONTAINS TRANSFORMER AND RGB CONTROLLER)

LENGHT/WIDTH/HIGH: 12x16x8cm


- Put the transformer inside the connection box and install a 1/2 meter to two of the shower head.
- The connection from the box to the electrical outlet has a length according to the needs of the project. (Cable not included).



MOUNTING SYSTEM

The waterfall to embed in work.

- 1) 1 1/2" female fitting for width 500mm and 2" female for width 1000mm, both centered at the bottom of the waterfall.
- 2) Fix the earth connection.
 - a) Impulsion tube \varnothing 50mm (width 500) and \varnothing 63mm (width 1000).
 - b) Self-priming pump:
 - 105CR (500): 1,5hp - 21,5m³/h (Ref. AQA-B21).
 - 105CR (1000): 2hp - 26,6m³/h (Ref. AQA-B26).
 - c) Suction tube 2" (\varnothing 63mm).

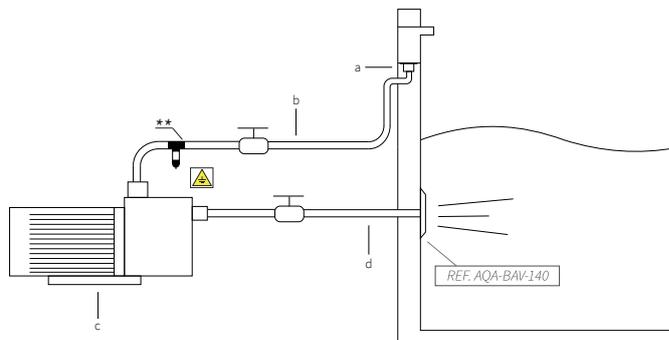

*Pneumatic or electric button to be defined in work.

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.