




REF. 110


Cannon Ø63mm in stainless steel AISI 316L (Marine quality). Polished or satin finish.




Support Included



Nuts Included



Earth Connection

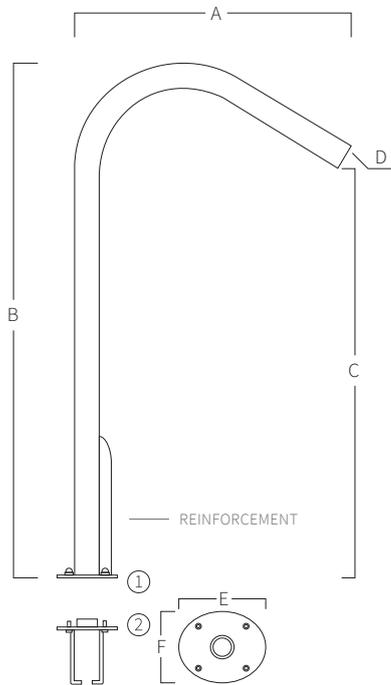

INTERCHANGEABLE PIPES



E



F



G



H

A	B	C	D	E	F
700	1250	900	Ø63x1,5	175	145
27,56	49,21	35,43	Ø2,48x0,59	06,89	05,71

Measures in mm
Mesures in inch


① Nuts to fix cannon.

② Support to embed at ground level.

MOUNTING SYSTEM

- 1) Connect the water intake to the support with 1 1/2" female fitting.
- 2) Fix the earth connection to the support.
- 3) Embed the support to get the platen at ground level.
- 4) Fix the cannon with the nuts.
 - a) Impulsion tube 2" (Ø63mm).
 - b) Self-priming pump:
 - 110: 1hp - 17,3m³/h (Ref. AQA-B17).
 - c) Suction tube 2" (Ø63mm).

**Pneumatic or electric button to be defined in work.

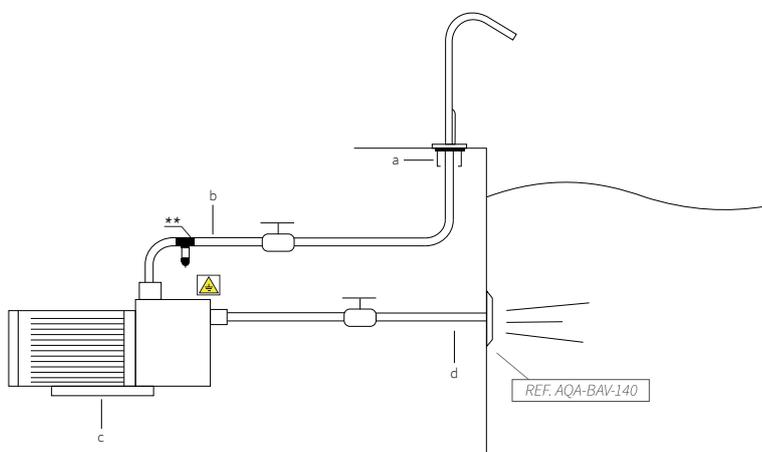

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.