



REF. 112A


Waterfall in stainless steel AISI 316L (Marine quality). Polished finish.



Screws
Included




Earth
Connection

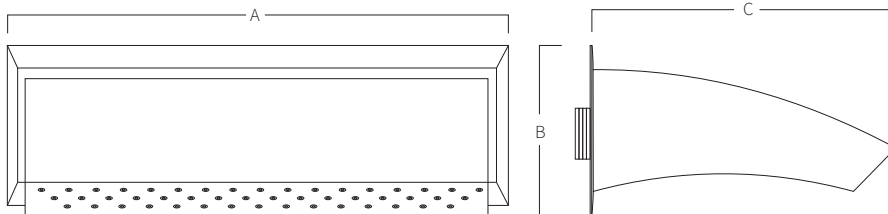

A	B	C
300 11,81	140 05,51	250 09,84
500 19,69	140 05,51	250 09,84
700 27,56	140 05,51	250 09,84
1000 39,37	140 05,51	250 09,84

Measures in mm
Mesures in inch

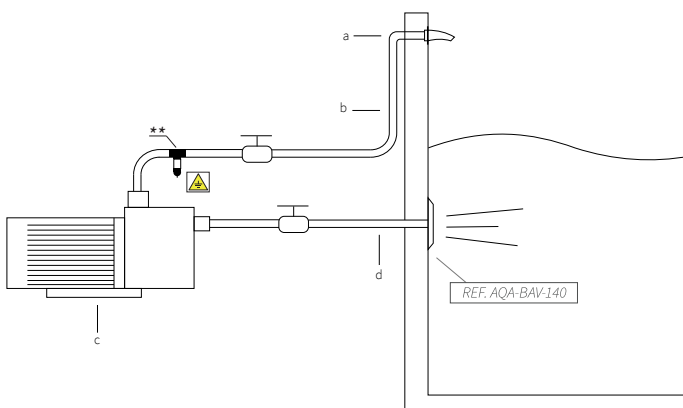

MOUNTING SYSTEM

- 1) Screw at the wall with a 1 1/2" male fitting (width 300/500) and 2" male fitting (width 700/1000).
- 2) Connect the earth connection.
- 3) Fix with the 4 screws.
 - a) Impulsion tube $\varnothing 50\text{mm}$ (width 300/500) and $\varnothing 63\text{mm}$ (width 700/1000).
 - b) Self-priming pump:
 - 112A (300): 0,50hp - 8m³/h (Ref. AQA-B8).
 - 112A (500): 0,80hp - 10m³/h (Ref. AQA-B10).
 - 112A (700): 1hp - 17,3m³/h (Ref. AQA-B17).
 - 112A (1000): 1,5hp - 21,5m³/h (Ref. B21).
 - c) Suction tube 2" ($\varnothing 63\text{mm}$).

*Pneumatic or electric button to be defined in work.

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.