




REF. AF-13

Waterfall in stainless steel AISI 316L (Marine quality) and fiberglass structure. Polished finish.



Earth

Connection


Fiberglass


Nuts

Included


Support

Included





Α	a'	В	С	D	E
1140 <i>44,8</i> 8	500 19,69	1320 <i>51,97</i>	210 <i>08,27</i>	500 19,69	150 <i>05,91</i> mm inch

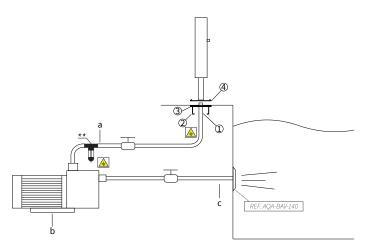

MOUNTING SYSTEM

- 1) Connect the water intake to the support with 1 1/2" female fitting.
- 2) Fix the earth connection to the support.
- 3) Embed the support to get the platen at ground level.
- 4) Fix the structure with the nuts (included).
 - a) Impulsion tube 2" (Ø63mm).
 - b) Self-priming pump: AF-13: 1,5hp - 21,5m³/h (Ref.AQA-B21).
 - c) Suction tube 2" (Ø63mm).
- *Pneumatic or electric button to be defined in work.

^{**}AQA recommends to install a POOL PROTECTOR, to avoid corrosion of the existing stainless steel elements in the pool.