


А

С




Waterfall in stainless steel AISI 316L (Marine quality) and fiberglass structure. Satin finish.



Included


Support Included

Earth Connection



С А a' в D 550 260 830 310 230 09,06

21,65 10,24 32,68 12,20 mm inch

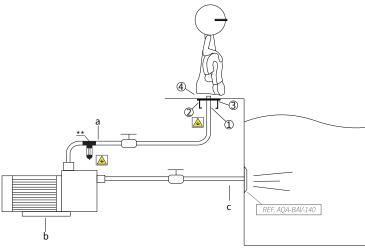

MOUNTING SYSTEM

- 1) Connect the water intake to the support with 1 1/2" female fitting.
- 2) Fix the earth connection to the support.
- 3) Embed the support to get the platen at ground level.
- 4) Fix the structure with the nuts (included).
- a) Impulsion tube 2" (Ø63mm).
- b) Self-priming pump:
 - AF-14: 0,80hp 10,5m³/h (Ref.AQA-B10).
- c) Suction tube 2" (Ø63mm).

*Pneumatic or electric button to be defined in work.

**AQA recommends to install a POOL PROTECTOR, to avoid corrosion of the existing stainless steel elements in the pool.