



REF. AF-18

Waterfall in stainless steel AISI 316L (Marine quality) and fiberglass structure. Polished finish.





















Support Included

Nuts Included


Earth Connection

Fiberglass

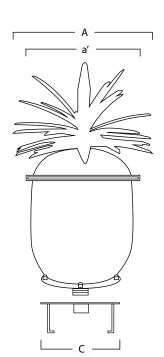



Α	a'	В	С
500 19,69	460 18,11	800 <i>31,50</i>	Ø190 Ø07,48
			mm inch

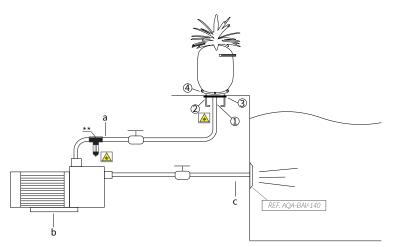

MOUNTING SYSTEM

- 1) Connect the water intake to the support with 1 1/2" female fiting.
- 2) Fix the earth connection to the support.
- 3) Embed the support to get the platen at ground level.
- 4) Fix the structure with the nuts (included).
 - a) Impulsion tube 2" (Ø63mm).
 - b) Self-priming pump:

AF-18: 1,5hp - 21,5m³/h (Ref.AQA-B21).

c) Suction tube 2" (Ø63mm).

^{*}Pneumatic or electric button to be defined in work.

^{**}AQA recommends to install a POOL PROTECTOR, to avoid corrosion of the existing stainless steel elements in the pool.